Versatile®

VM704/VM704A Moulder

W 1010mm x D 950mm x H 1610mm

Product Features

• Fitted with patented Bap/Panini flattening rollers (VM704 only)


- Four piecing fitted as standard
- Loaf guides fitted for loaf uniformity
- Emergency stop button
- Derpanyl composite non-stick moulding belt and teflon coated rear moulding board
- LightSpeed operator protection system
- Weight range 35-1000gms
- Maximum output 900 loaves / 1800 rolls per hour





Versatile®

VM704/VM704A Moulder

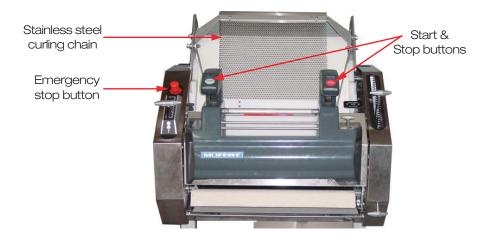

Overall Construction

- · Galvanised steel main body, stainless steel finish
- Fibreglass mouldings
- Curling chain stainless steel construction (removable for cleaning)
- Sheeting rollers non stick PVC material

Operation

- Four piecing blades activated by front level
- Loaf quides fitted with width adjustment lever
- Fully adjustable sheeting roller settings
- Operation & emergency stop buttons (front mounted)

MOFFAT®

Australia www.moffat.com.au New Zealand www.moffat.co.nz

Australia Moffat Pty Limited

Victoria/Tasmania 740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9518 3833 vsales@moffat.com.au www.moffat.com.au

New South Wales Telephone 02-8833 4111 nswsales@moffat.com.au

South Australia Telephone 03-9518 3888 vsales@moffat.com.au

Queensland Telephone 07-3630 8600 qldsales@moffat.com.au

Western Australia Telephone 08-9202 6820 bgarcia@moffat.com.au

New Zealand Moffat Limited

Christchurch 16 Osborne Street Christchurch 8011 Telephone 03-389 1007 Facsimile 03-389 1276 sales@moffat.co.nz

Auckland Telephone 09-574 3150 sales@moffat.co.nz

Dimensions

Width: 1010mm

Depth: 950mm Height: 1610mm Nett weight: 410kg Max Moulding Length

70mm

Electrical Requirements 400-415V, 3P+E, 50Hz, 1.0kW Supplied with a 4 pin, 10amp plug

Additional Technical Information

Power outlet to be located a minimum 1.5m off floor



