PFA SERIES MODELS

FULLY AUTOMATIC VENTLESS COUNTERTOP DEEP FRYER











PERFECT FRY COMPANY 42 Allen Martin Drive Essex Junction, VT 05452

Phone: (802) 658-6600 Fax: (802) 864-0183

www.perfectfry.com

The Benchmark in Ventless Deep Frying

- FULLY AUTOMATED COOKING SYSTEM
- FRONT LOADING/ FRONT DISPENSING
- SMALL FOOTPRINT
- PROGRAMMABLE PRESETS
- ODORLESS
- INTEGRAL VENTLESS HOOD
- INTEGRAL FIRE SUPPRESSION
- LARGEST OUTPUT
- EASY TO CLEAN
- FULLY ENCLOSED
- INFRA-RED, CERAMIC HEAT LAMP AND OIL DRAINAGE KIT
- NON-STICK BASKET



CLEARANCES 27" (677mm) 17" (434mm) CLEARANCES 1" on sides 2" on back 0" on top 30" (762mm)

AIRFLOW DIAGRAM

SPECIFICATIONS TABLE

MODEL	PFA720	PFA570	PFA570	PFA375
Power Supply (volts)	380/220	240	208	240
Current (amps)*	9.2	25.4	28.8	18
Cord Option	8/3 powercord 6-50 plug	8/3 powercord 6-50 plug	8/3 powercord 6-50 plug	10/3 powercord 6-30 plug
Power (kilowatts)	6.0	6.1	6	4.2
Capacity (lbs/hr)‡**	90 lbs	70 lbs	70 lbs	50 lbs


¹ Other voltages and/or wattages may be available, contact factory.

ADVANCED ELECTRONIC CAPABILITIES

- COOK TIME SENSITIVITY (CTS)™
- PRESET COUNTERS
- FOOD TYPE SENSITIVITY (FTS)™
- STAND-BY MODE
- DUAL LOAD COOK CYCLE
- HOLD TIME MONITOR

RAPIDFRY™ TECHNOLOGY

RapidFry™technology allows the operator to pre-load food into the drawer while other food product is frying in the cooking oil. The second load of food will automatically begin cooking once the first cook cycle is completed.

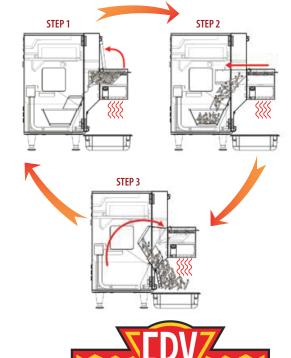

GENERAL SPECIFICATIONS

Heat Lamp (see below) Integral on all units Phase Single Phase (3 wire) Cycles 50/60 Hz Weight 125 lbs (57 kg) For use on an individual Shipping Weight 135 lbs (62 kg) branch circuit. This fryer must be properly connected to a **Shipping Dimensions** Depth 24" (610 mm) grounded, dedicated phase Width 29" (737 mm) circuit according to local Height 36" (914 mm) installation standards and codes. Shipping Cube 9.52 ft3 (.271 m3) Using 11/2 minute fast fries 2.75 US Gallons (11 L) Oil Capacity Locking cabinet option also available **Product Capacity** 3 lbs per load

ACCESSORIES

HEAT LAMP
2 amp, 240 volt, 500 watts
Ordered separately as accessory



COMPANY

PERFECT