## Single TF DBC® SST

Height: 35.7" Width: 12.1" Depth: 22.7" (90.7cm) (30.7cm) (57.7cm)



Server(s) sold separately

## Specifications

Product #: 34800.0012 Water Access: Plumbed

Water Access. Flumber

Interface: Wireless Finish: Stainless

#### **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
220-240	14.5-15.7	3180-3780	Yes	EURO 16A	171	60°F (15.5°C)	1	2	50-60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine if the machine is marked with the before mentioned ratings.

## **Plumbing Requirements**

#### **CAD** Drawings

	3 1				3-	
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	3/8" Male Flare Fitting	-	•		
A						

WARNING:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 05/09/2023

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

• Brews 16.3 to 18.9gal (61.7 to 71.5L) of perfect coffee per hour

- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- Create coffee recipe cards with custom recipes, ad cards with messages that display on the brewer LCD, and dedicated funnels for special coffees with the BrewWISE Recipe Writer using your PC (Windows® compatible).
- Easy pulse interface allows automatic programming of pulse routine
- Preventive maintenance kit: 39641.0000
- SplashGard® funnel and optional funnel locks help improve safety
- Stores individual coffee recipes so operator can easily brew many varieties
- ThermoFresh® servers are vacuum insulated to keep coffee hot for hours.
- Brews 1/2, 1 or 1 1/2gal (1.9, 3.8 or 5.7L) batches
- Energy saver mode reduces tank temperature during idle periods
- Operate any combination of BrewWISE equipment error-free with wireless brewergrinder interface through Smart Funnel with SplashGard®
- · Servers not included unless otherwise noted

Agency:


Funnel: Smart Funnel

Faucet: Lower



Additional Features

BrewWISE

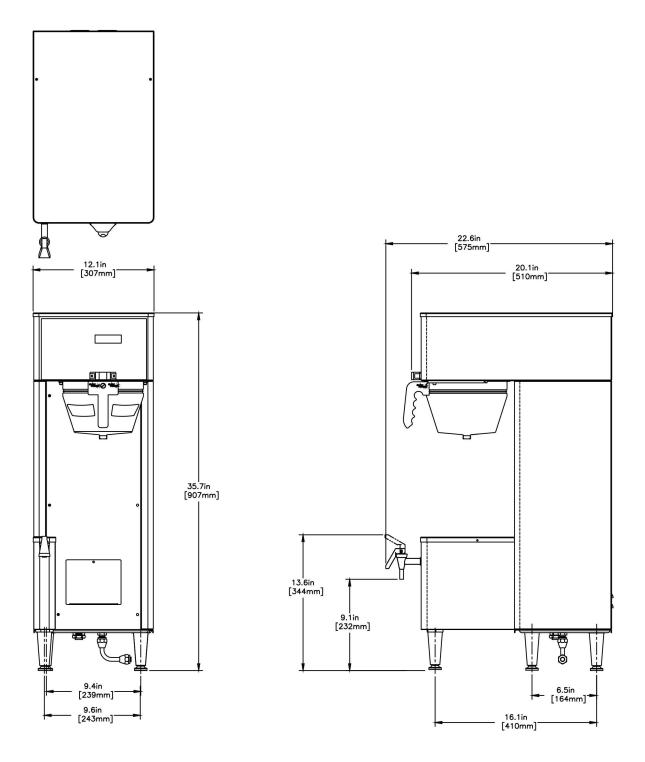

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	35.7 in.	12.1 in.	22.7 in.	30.8 in.	17.5 in.	26.7 in.	72.510 lbs	8.311 ft <sup>3</sup>	
Metric	90.7 cm	30.7 cm	57.7 cm	78.1 cm	44.5 cm	67.8 cm	32.891 kgs	0.235 m³	




BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
Last Updated:

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
05/09/2023

For most current specifications and other info visit bunn.com.
Control of the second seco

# Related Products & Accessories:Single TF DBC® SST(34800.0012)

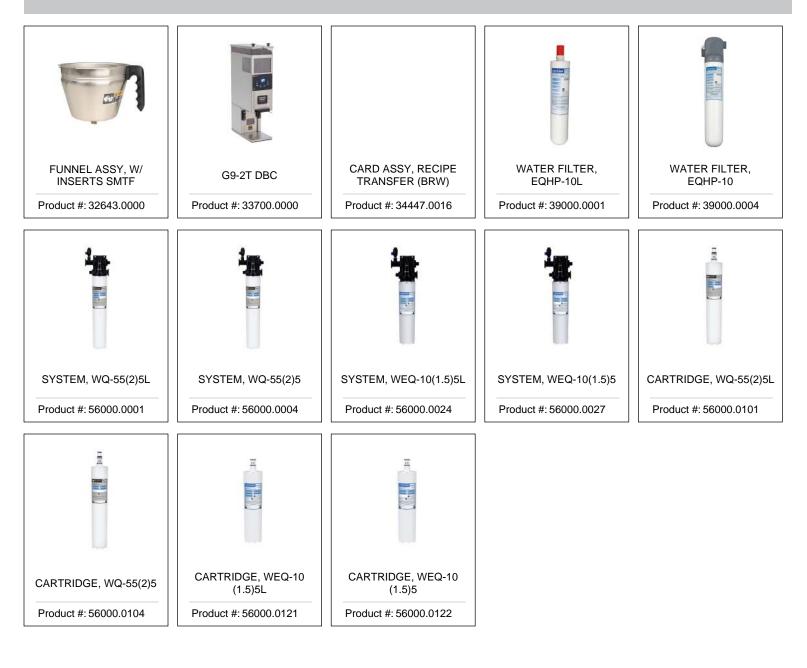



# Serving & Holding Options: Single TF DBC® SST(34800.0012)



