

# COUNTER

GELATO

# G3-SS/ST

COUNTER GELATO SHOWCASE



Ventilated



Opening glass



Temperature -16~-18°C



Environmental Condition +30°C /60%RH


# TECHNICAL SPECIFICATIONS AND PRODUCT RANGE

## AESTHETIC AND FRAMEWORK

- Counter showcase for small space
- Single, tempered and heated glass door
- LED lighting system inside, energy-saving and durability
- Operator's or customer's side closing (optional)
- Pans, stick plastic box and barrel optional

## TECHNOLOGY

- Cooling system with hermetic compressor for incorporated static-cooling condensing units
- Electronic check panel with digital thermometer and thermostat

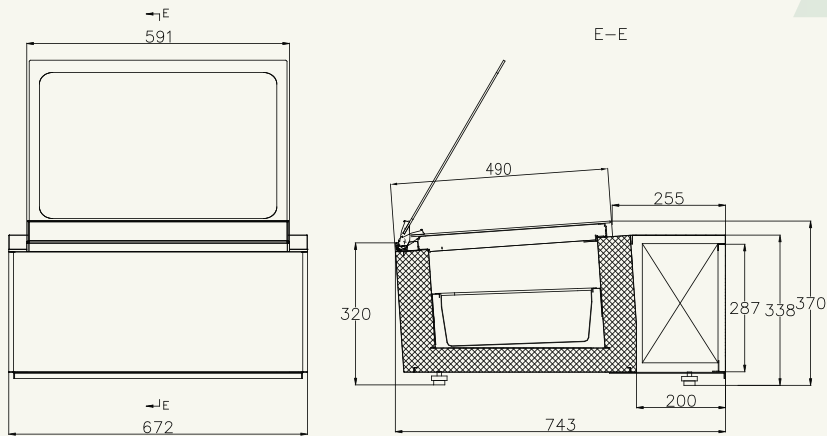

MODEL	DIMENSIONS LXWXH ( MM )	WORKING TEMP (°C)	WEIGHT (NET / GROSS)(KG)	VOLTAGE V/PH/HZ	RATED CURRENT (A)
G3-SS/ST	672*745*370	-16°C~-18°C	50/58	230/1/50	3.0A

N.B.:The working temperature refers to the following environmental conditions: +30°C/60% Relative Humidity

# THEY ARE USING G3-SS/ST



# G3-STD/SSD

COUNTER GELATO SHOWCASE



Static



Opening glass



Temperature -16~-18°C



Environmental Condition +30°C /60%RH


# TECHNICAL SPECIFICATIONS AND PRODUCT RANGE

## AESTHETIC AND FRAMEWORK

- Counter showcase for small space
- Single, tempered and heated glass door
- LED lighting system inside, energy-saving and durability
- Operator's or customer's side closing (optional)
- Pans, stick plastic box and barrel optional

## TECHNOLOGY

- Cooling system with hermetic compressor for incorporated static-cooling condensing units
- Electronic check panel with digital thermometer and thermostat

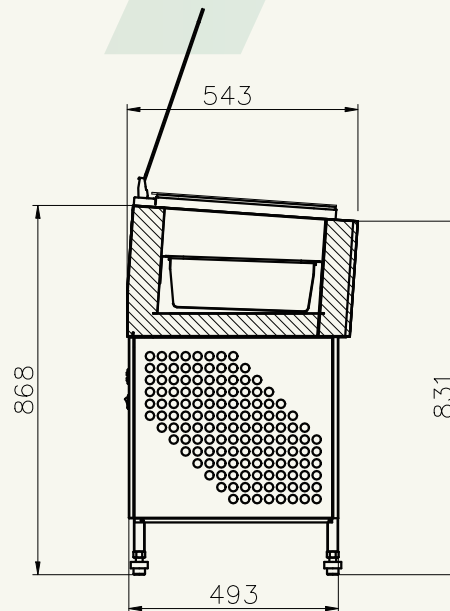

MODEL	DIMENSIONS LXWXH ( MM )	WORKING TEMP (°C)	WEIGHT (NET / GROSS)(KG)	VOLTAGE V/PH/HZ	INPUT POWER (W)
G3STD/SSD	743*672*905	-16°C~-18°C	85/105	230/1/50	660

N.B.:The working temperature refers to the following environmental conditions:+30°C/60% Relative Humidity

# THEY ARE USING *G3-SSD/STD*



# G3 WIN-SS

COUNTER GELATO SHOWCASE



Static



Opening glass



Temperature -16~-18 C



Environmental Condition +30 C /60%RH





# TECHNICAL SPECIFICATIONS AND PRODUCT RANGE

## AESTHETIC AND FRAMEWORK

- Counter showcase for small space
- Single, tempered and heated glass door
- LED lighting system inside, energy-saving and durability
- Operator's or customer's side closing (optional)
- Pans, stick plastic box and barrel optional
- With counter top for cups and cones box

## TECHNOLOGY

- Cooling system with hermetic compressor for incorporated static-cooling condensing units
- Electronic check panel with digital thermometer and thermostat
- With wheels and feet, easy to move and fix

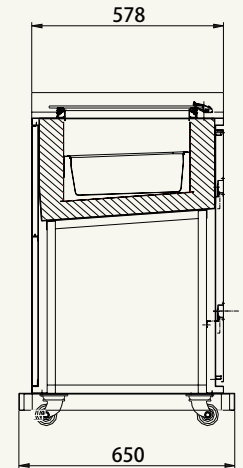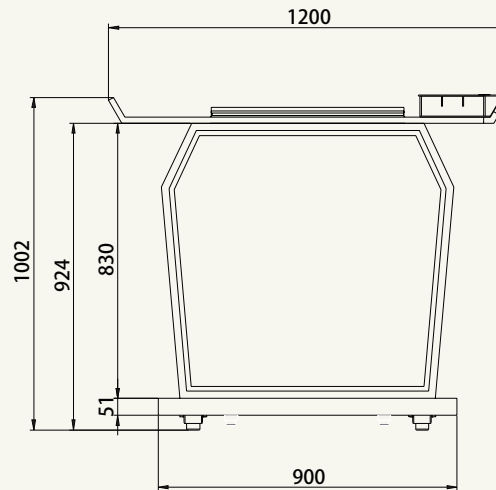

MODEL	DIMENSIONS LXWXH ( MM )	WORKING TEMP (°C)	WEIGHT (NET / GROSS)(KG)	VOLTAGE V/PH/HZ	INPUT POWER (W)
G3WIN-SS	1200*650*1002	-16°C~-18°C	85/105	220-240/1/50	500

N.B.:The working temperature refers to the following environmental conditions:+30°C/60% Relative Humidity

# DETAILS G3WIN-ST



*details*

# G9-ST/SS

COUNTER GELATO SHOWCASE



Static



Opening glass



Temperature -16--18 °C



Environmental Condition +30 °C /60%RH


# TECHNICAL SPECIFICATIONS AND PRODUCT RANGE

## AESTHETIC AND FRAMEWORK

- 3 counter showcases inside with the Separate temperature control system
- Single, tempered and heated glass door
- LED lighting system inside, energy-saving and durability
- Operator's or customer's side closing (optional)
- Pans, stick plastic box and barrel optional

## TECHNOLOGY

- Cooling system with hermetic compressor for incorporated static-cooling condensing units
- Electronic check panel with digital thermometer and thermostat

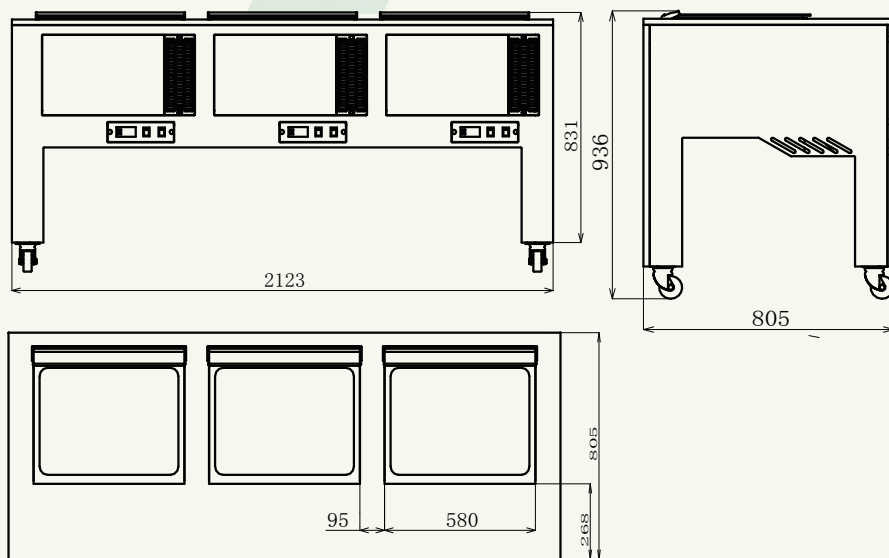

MODEL	DIMENSIONS LXWXH ( MM )	WORKING TEMP (°C)	WEIGHT (NET / GROSS)(KG)	VOLTAGE V/PH/Hz	INPUT POWER (W)
G9-ST/SS	2123*805*936	-16°C~-18°C	85/105	220-240/1/50	1980

N.B.:The working temperature refers to the following environmental conditions:+30°C/60% Relative Humidity

# DETAILS *G9-SS/ST*



Create happiness for  
your business life



QINGDAO CLABO EASYBEST REFRIGERATION EQUIPMENT CO.,LTD.

TEL: +86-532-55677991  
Free Service Call  
400-069-6799

Service Hotline: +86-15969849257  
E-mail: [info@qdeasybest.com](mailto:info@qdeasybest.com)  
[Http://www.qdeasybest.com](http://www.qdeasybest.com)  
[Http://easybestcn.1688.com](http://easybestcn.1688.com)

No.2 Ronghai Road  
Jihongtan Street,Chengyang  
District ,Qingdao Shandong,  
China 266109



EasyBest官网



EasyBest客户之家