

Lincoln®

Digital Countertop Impinger (DCTI) Electric Oven Standard and Ventless Models

Models

- 2500/V2500
- 2504/V2504
- 2505
- 2507
- 2508/V2508
- 2509/V2509
- 2510/V2510
- 2512/V2512
- 2514/V2514



Shown with 50" (1270mm) extended conveyor.

Benefits

Air Impingement

Air impingement uses hot air under pressure which surrounds food with small jets of hot air. This allows for rapid heating, cooking, baking and crisping of foods, two to four times faster than conventional ovens, depending on food product cooked.

Uniform Heating

Uniform heating/cooking of food products offers a wide tolerance for rapid baking at a variety of temperatures.

Variable Speed Continuous Cook Platform

Variable speed continuous cook platform moves product through the oven one after another improving product flow during cooking eliminating the need for constant tending resulting in reduced labor.

Ventless

Ventless ovens equipped with catalysts are available for ventless installations.

Specifications

General:

- Stainless steel top, front and sides
- 20" (508mm) wide baking chamber
- Stackable up to two high
- 3" conveyor opening
- 4" legs

Controls:

- Adjustable temperature from 90°F (32°C) to 600°F (316°C) to accommodate a wide range of products
- Adjustable conveyor speed from 30 seconds to 15 minutes cooking time for menu flexibility
- Digital controls feature reversible conveyor direction, manual override, speed, temperature, and four (4) pre-set menu buttons with menu item, cook time and temperature displayed

Conveyor:

- 16" wide x 31" conveyor standard with crumb trays
- 16" wide x 50" conveyor with crumb trays (optional)
- 16" wide x 50" non-stick conveyor with crumb tray (optional)


Options:

- KNLZ certified models available for ventless operation
- Quiet bake option (add -4 to model number)
- 4" and 12" entry and exit shelves
- Conveyor end stop
- Stand with bottom shelf and casters for single and double stacking




Dual Voltage Digital Countertop Impinger (DCTI) Electric Oven

Single stack dimensions:

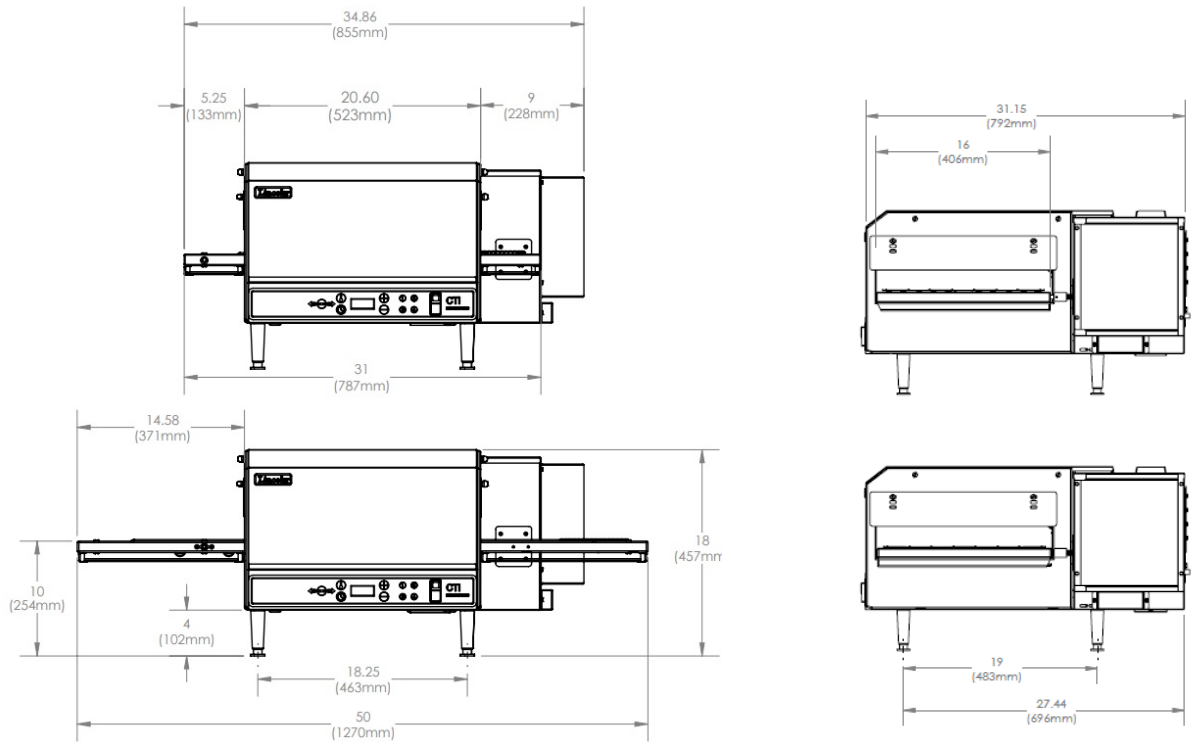

Double stack dimensions:

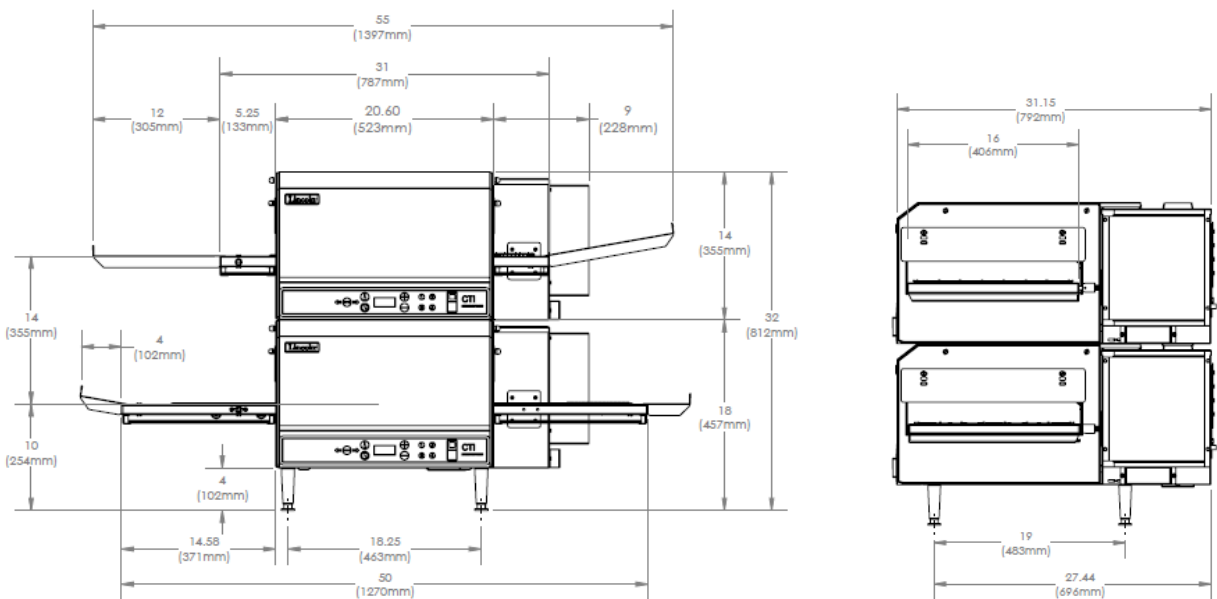


Dimensions

	WIDTH (31" CONVEYOR)*	WIDTH (50" CONVEYOR)**	DEPTH	HEIGHT	WEIGHT	SHIPPING WEIGHT	APPROXIMATE SHIPPING DIMENSIONS				
	CU. FT.	W	D	H	CLASS						
SINGLE STACK	34.9" (886 mm)	50" (1270 mm)	31.1" (790 mm)	18" (457 mm)	175 lb (80kg)	250 lb (114 kg)					
DOUBLE STACK	34.9" (886 mm)	50" (1270 mm)	31.1" (790 mm)	32" (813 mm)	350 lb (159 kg)	500 lb (227 kg)	35	61" (1549 mm)	42" (1067 mm)	24" (610 mm)	85

*1353 - 31" STANDARD CONVEYOR
 **1346 - 50" EXTENDED CONVEYOR
 **1366 - 50" NON-STICK EXTENDED CONVEYOR

Model Specifications

DOMESTIC MODELS	INPUT RATE	AMPS	VOLTAGE	HERTZ	PHASE	# OF WIRES	CERTIFICATIONS	PLUG
2500/V2500	6kW	27/31	208/240	60	1	3	CSA, NSF, UL	 NEMA 6-50P

EXPORT MODELS	INPUT RATE	AMPS	VOLTAGE	HERTZ	PHASE	# OF WIRES	CERTIFICATIONS
2504/V2504	6kW	25	240	50	1	3	NSF
2505	6kW	15	380/220	50	1	4	NSF
2507	6kW	18	200	50/60	3	5	NSF
2508/V2508	6kW	10	380/220	50	3	5	NSF, CE
2509/V2509	6kW	8	415/240	50	3	5	NSF, CE
2510/V2510	6kW	28	220	50/60	1	3	NSF
2512/V2512	6kW	9	400/230	50	3	5	NSF, CE
2514/V2514	6kW	25	240	50	1	3	NSF, CE

*V denotes ventless model. Ventless model has been tested to UL710B standards and is KNLZ listed.

Electrical Service:

Domestic ovens ship with a factory installed cord with NEMA 6-50 plug. A separate circuit breaker is required for each oven deck with the proper voltage, amperage, phase and hertz as indicated by model number.

Ventilation:

Ventilation is recommended, but not required. Local codes prevail. These are the 'authority having jurisdiction' as stated by the National Fire Protection Association, Inc. in NFPA-96-1994.

Clearance:

The oven must have 6" (152mm) of clearance from combustible surfaces and 24" (610 mm) clearance on both sides from other cooking equipment. The conveyor is removed from the control side of the oven.

Lincoln reserves the right to make changes to the design or specifications without prior notice.