


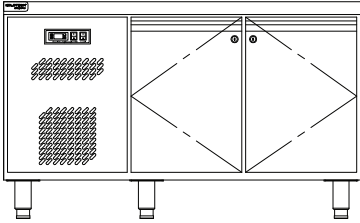
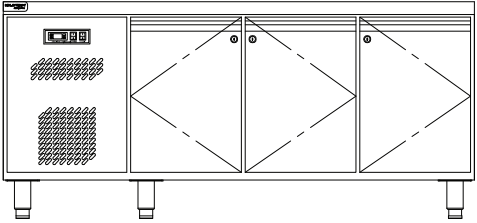
KOLDTECH®

M UR-SERIES®

Heavy Duty 1, 2 and 3 Section Under Counter Refrigerator

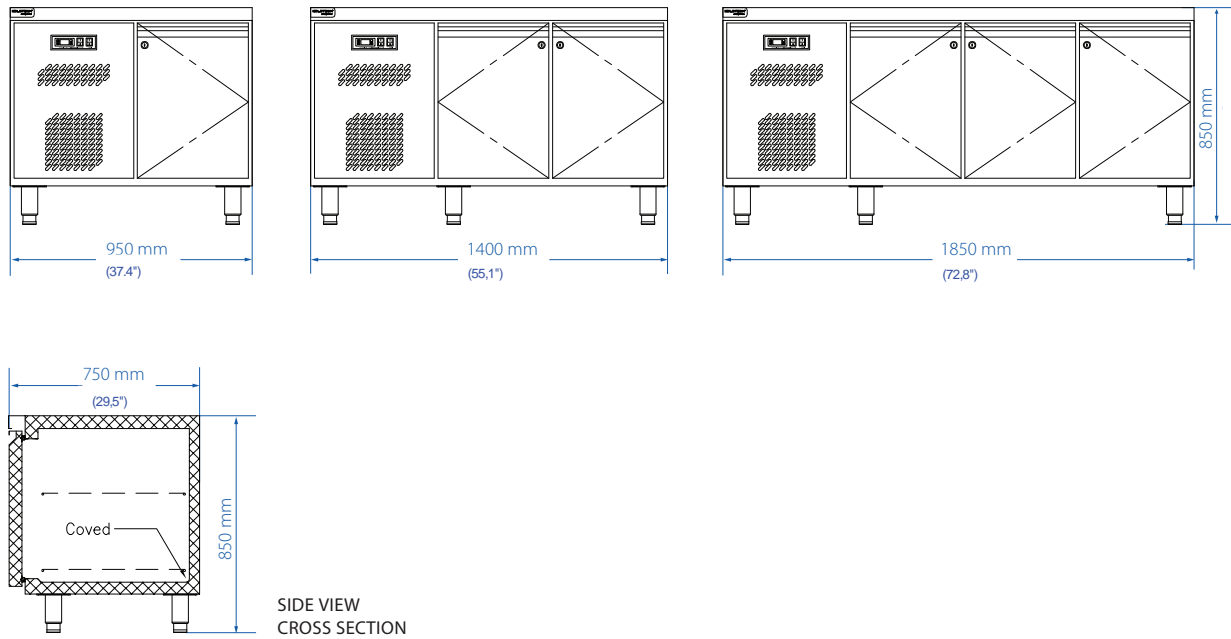
Project _____
 Item _____
 Quantity _____
 Approval _____
 Date _____

M UR-SERIES® Heavy Duty 1, 2 and 3 Section Under Counter Refrigerator

Model		
<input type="checkbox"/> M UR-1-950	<input type="checkbox"/> M UR-2-1400	<input type="checkbox"/> M UR-3-1850
		

Standard Features

- Body and Finish :
- Interior 304 with coved corner floor
 - Exterior 430 food grade stainless steel
 - High density foamed in place
 - Environmentally friendly, low energy design
 - Integral door handle
 - Electronic temperature control
 - Durable, hygenic door gasket removable without tools
 - PVC Coated shelves (2 per section)
- Temperature Range : 2°C to 5°C
- Refrigerant : R-134a
- Insulation : 50 mm strong polyurethane foamed body construction
- Controller: Multi-function microprocessor controller with digital temperature display.
- Defrost System: Circulating Air
- Power Supply: 220-240V / 50Hz, 1 Ph



Dimensions & Capacity

MODEL	OVERALL SIZE			CABINET CAPACITY (LITER)
	WIDTH	DEPTH	HEIGHT	
M UR-1-950	950 mm (37.4")	750 mm (29.5")	850 mm (33.5")	160
M UR-2-1400	1400 mm (55.1")	750 mm (29.5")	850 mm (33.5")	329
M UR-3-1850	1850 mm (72.8")	750 mm (29.5")	850 mm (33.5")	485

GENERAL SPECIFICATION

- Left side compressor compartment standard
- Hot gas condensate removal
- Fitted with condensate evaporator, no drain connection required
- Removable door gasket
- 150 mm heavy duty, adjustable (140-180 mm), stainless steel bullet feet
- 250 cm cord and plug attached

Specifications

	MODEL		
	M UR-1-950	M UR-2-1400	M UR-3-1850
Temperature range	2°C to 5°C		
Refrigerant	R-134a		
Interior light (Watts)	3		
Compressor (Hp.)	1/3	1/3	1/3
Shelves	2 pcs. (GN1/1)	4 pcs. (GN1/1)	6 pcs. (GN1/1)
Power consumption (Watts)	476	500	724

Options

- Stainless steel wire shelf
- Casters, set of 4 (2 with brake) and 6 (with 3 brake)
- 2 Drawers in lieu of solid door-per section
- 3 Drawers in lieu of solid door-per section
- Top with backsplash in lieu of flat top
- Compressor compartment on right
- Plate lock for unit with doors (each)
- Exterior in 304 stainless steel
- Back side in 304 stainless steel

For further information on **KOLDTECH®** products and services or advice on which equipment suits your needs best please contact our Sales Office. Our products are being continuously improved, specifications are subject to change without notice.

